

# Parblo

## COAST 10 PRO QUICK START GUIDE



官方微博  
parblo数位板



微信公众号  
parblocn



哔哩哔哩  
parblo数位板



parblo  
小助手



[www.parblo.com](http://www.parblo.com)



[instagram.com/ParbloTech](https://www.instagram.com/ParbloTech)



[facebook.com/ParbloTech](https://www.facebook.com/ParbloTech)



[twitter.com/ParbloTech](https://twitter.com/ParbloTech)

EN | CN | JP

# CONTENTS

English

1


中文

5

日本語


8

## 1. OVERVIEW

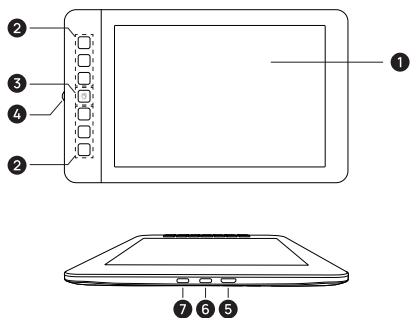


- 1 Display/Active Area
- 2 Express Keys
- 3 Power Switch Key
- 7 Power Supply Interface  
(This interface needs to be connected when the computer cannot supply power to the Coast10 Pro.)
- 4 OSD MENU
- 5 Mini HDMI Interface
- 6 USB-C Interface

## 2. PACKAGE CONTENTS



1

Coast10 Pro



2

Passive Pen



3

8 Replacement Nibs  
and Nib Removal Tool



4

HDMI Cable



5

USB Cable



6

Dual USB Type-C Cable



7

Artist Gloves



8

Cleaning Cloth



9

Quick Start Guide



10

Warranty Card

### 3. PRECAUTIONS FOR USE

Before installing and using this product, please read the following precautions carefully:

#### 1. Compatibility:

Windows 8,10 ,11and above

Mac OS X 10,12 and above

(If your computer operating system is lower than the above version, please upgrade firstly in order not to affect the use.)

#### 2. Know Before Installation:

- (1) Disable any anti-virus software and firewall temporarily.
- (2) Close other computer software that has been opened, such as Photoshop, SAI, Office software, etc.
- (3) Uninstall and completely remove any drivers of other graphic tablet/monitor installed in your computer.


### 4. INSTALLATION GUIDE

#### 1. Connection:

Please select a suitable connection method according to your computer port. After the successful connection, the Coast10 Pro will display the computer homepage.

**Method 1** (If there are both an HDMI interface and USB interface on your computer, please follow Method 1.):


- (1) Use HDMI cable to connect the "HD" port of Coast10 Pro and the "HDMI" port of PC.
- (2) Use the USB to USB Type-C cable to connect the "USB-C" port of Coast10 Pro and "USB" port of PC.

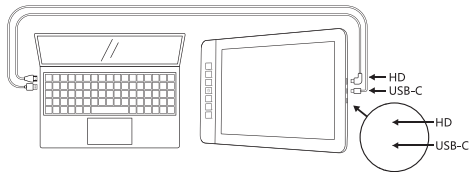

**Notice:** When the computer cannot supply enough power to the graphic drawing monitor, external power supply is needed. The Android phone type-C interface cable can be used to connect the power port (Ⓜ) on the graphic drawing monitor for external power supply.

**Method 2** (If there is a USB 3.1 interface or a Thunderbolt 3 interface, please follow Method 2.):

Use dual USB Type-C cable to connect the "usb-c" port of Coast10 Pro to the computer.

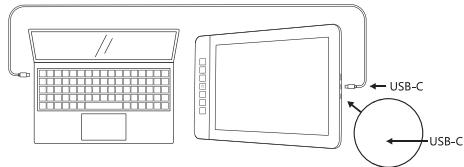

#### 2. Windows Driver Installation:

- ① Driver download and installation: Download the latest driver from Parblo official website ([support.parblo.com](http://support.parblo.com)), unzip the package after downloading, and then double-click the ".exe" file to complete the installation according to the instructions.
- ② After the driver is installed, you can see the small driver icon in the taskbar at the right corner of the computer desktop.
- ③ If you cannot see the icon, please reinstall the driver. Right-click on desktop and select "Display settings". Use the slider to "change the size of text, app, and other items". It might be set to 100%.
- ④ Under the "Multiple displays" section, you can set the Coast10 Pro to be "Duplicate these displays" or "Extend these displays".
- ⑤ If set it to be "Extend these displays", please set the resolution of the Coast10 Pro to "1920\*1080"; and set the handwriting control area to the Coast10 Pro in the driver setting interface.



### 3. Mac Driver Installation:

- 1 Driver download and installation: Download the latest driver from Parblo official website ([support.parblo.com](http://support.parblo.com)), unzip the file package after downloading, and then double-click the ".pkg" file to complete the installation according to the instructions.
- 2 If your computer system is Mac OS X 10.14 and above, please follow the operating instructions for security settings. After installation, the driver can be opened for normal use (for versions below Mac OS 10.14, please ignore this step).
- 3 After the driver installation is complete, click the computer "System Preferences > Displays", and set the resolution of the Coast10 Pro to the default value of 1920\*1080 in the display window.
- 4 Click "Arrangement" at the top under the "System Preferences > Displays" page, you can select "Mirror Displays" or choose the extended desktop according to your needs.

## 5. CUSTOMER SUPPORT


- (1) Visit the Parblo support page ([support.parblo.com](http://support.parblo.com)) to get the latest drivers, user manuals, and FAQs.
- (2) When you met issues with Coast10 Pro, you can find a solution from the FAQ on the Parblo support page.
- (3) Check for the updated driver of Coast10 Pro driver: [support.parblo.com](http://support.parblo.com).

## 1.概述

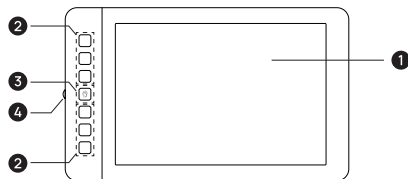

- |                                 |               |
|---------------------------------|---------------|
| 1 显示/工作区域                       | 4 OSD菜单键      |
| 2 快捷键                           | 5 MINI HDMI接口 |
| 3 电源键                           | 6 USB-C接口     |
| 7 供电接口<br>(当电脑不能供电给数位屏时需要连接此接口) |               |

## 2. 包装内容



1

Coast10 Pro



2

无源笔



3

8支替换笔芯和笔芯夹



4

HDMI线



5

USB数据线



6

双头USB Type-C数据线



7

绘画手套



8

清洁布



9

快速安装指南



10

保修卡

## 3. 注意事项

在安装使用本产品前, 请仔细阅读以下注意事项:

### 1. 产品目前支持的电脑操作系统:

Windows 8/10/11及以上

Mac OS X 10.12及以上

如果您的电脑操作系统低于以上版本, 为不影响使用, 请先升级

### 2. 安装前须知:

(1) 安装前请先暂时关闭杀毒软件。

(2) 关闭已经打开的电脑其他软件如: Photoshop, SAI, office软件等。

(3) 如果电脑已经安装其他数位板或数位屏的驱动, 请务必先卸载相关驱动并重新启动电脑。

## 4. 安装使用指南


### 1. 连接电脑:

请根据自己的电脑端口选择适合的连接方式, 连接成功后数位屏将会显示电脑画面。

#### 方式一: 使用USB数据线和HDMI线连接电脑。

(1) 使用HDMI线连接数位屏的“HD”口和电脑的“HDMI”口;

(2) 使用USB数据线连接数位屏的“USB-C”口和电脑的“USB”口。

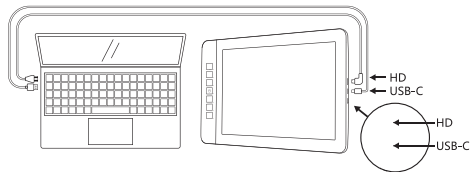


注意: 当电脑不能充足供电给数位屏时需要外部供电,

可使用安卓手机Type-c接口数据线连接数位屏上电源口(⏻)进行外部供电。

方式二:使用双头USB type-c数据线连接电脑。

使用USB Type-C数据线分别连接数位屏的“USB-C”口和电脑的“USB-C”口。

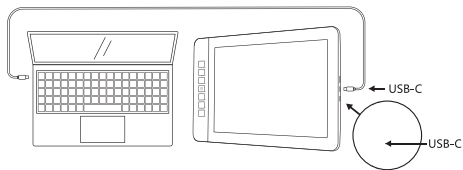

注意:适合部分带有雷电3及以上协议的苹果电脑和部分拥有全功能USB Type-C接口的Windows电脑。

## 2. Windows驱动安装:

- 1 驱动下载并安装:从Parblo官网([www.parblo.cn](http://www.parblo.cn))下载最新的驱动,下载完成后进行解压文件包,然后双击“.exe”文件按指引完成安装。
- 2 驱动安装完成后,您可以在电脑桌面右下角任务栏看到驱动小图标,如果无法看到该图标,请重新安装驱动。
- 3 在电脑的“显示设置”界面里将数位屏“更改文本、应用”等项目大小设置为“100%”。
- 4 在“显示设置”界面下“多显示器设置”可将数位屏设定为“复制模式”或者“拓展模式”。
- 5 若设定为“拓展模式”,请将数位屏分辨率设定成“1920\*1080”,并在驱动设置界面将手写控制区域设置为数位屏。

## 3. Mac驱动安装:

- 1 驱动下载并安装:从Parblo官网([www.parblo.cn](http://www.parblo.cn))下载最新的驱动,下载完成后进行解压文件包,然后双击“.pkg”文件按指引完成安装。
- 2 如果您的电脑系统为10.14及以上版本,请按照操作指引进行安全性设置,完成后驱动即可打开正常使用(Mac OS10.14以下版本请忽略此步骤)。
- 3 驱动安装完成后,打开电脑“系统偏好设置--显示器”菜单,在显示器窗口将数位屏分辨率设定为默认值即1920\*1080。
- 4 在“系统偏好设置--显示器”页面下“排列”窗口可以选择“镜像模式”或者“拓展模式”,您可以根据需要进行调整。

注:想要获取详细的视频安装教程?请扫描下方二维码,关注Parblo微信公众号,并回复“视频教程”即可获取。




## 5. 客户支持

- (1) 访问Parblo支持页面[support.parblo.cn](http://support.parblo.cn),获取最新的驱动程序、用户手册和常见问题解答。
- (2) 使用Coast10 Pro遇到问题时,可从Parblo支持页面的FAQ找到解决方案。
- (3) 检查Coast10 Pro驱动更新:[support.parblo.cn](http://support.parblo.cn)

如在产品使用过程遇到操作使用问题,可扫描下方二维码添加Parblo企业官方售后微信提供技术支持。



## 1.概要

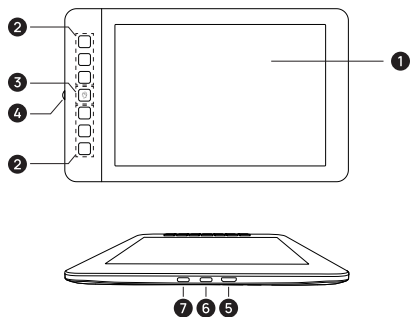

- ① 表示/作業エリア
- ② ショートカットキー
- ③ 電源スイッチキー
- ④ OSDメニューキー
- ⑤ MINI HDMIインターフェース
- ⑥ USB-Cインターフェース
- ⑦ 電源インターフェース  
(コンピューターがデジタル画面に電力を供給できない場合、  
このインターフェースを接続する必要があります)

## 2.付属品一覧



①  
Coast10 Pro



②  
パシッペン



③  
8つの交換用ペン芯  
とペン芯クリップ



④  
HDMIケーブル



⑤  
USBケーブル



⑥  
双頭USB Type-Cケーブル



⑦  
絵描き手袋



⑧  
クリーニングクロス



⑨  
製品使用ガイド



⑩  
保証書



## 3. 注意事項

この製品をインストールして使用する前に、次の注意事項をよくお読みください：

### 1. コンピューターシステム対応：

Windows 8, 10 と 11

Mac OS X 10.12 及びその以上

パソコン操作システムが上記のバージョンより低い場合は使用に影響を与えないように、最初にアップグレードしてください。

### 2. ドライバーをインストール前注意点：

- (1) インストールする前に、ウイルス対策ソフトウェアを一時的に閉じてください。
- (2) Photoshop, SAI, オフィスソフトウェアなど、閉じてください。
- (3) コンピューターに他のペンタブレットまたは液晶ペンタブレットのドライバーがインストールされている場合は、関連するドライバーをアンインストールしてコンピューターを再起動してください。


## 4. インストールガイド

### 1. パソコンと接続：

パソコンの差し込み口に合わせて、適切な接続方法を選択してください。接続に成功すると、液晶ペンタブレットにパソコンの画面が表示されます。

#### 方法1：コンピューターがHDMI差し込み口とUSB差し込み口の場合。


- (1) HDMIケーブルを使用して本体とコンピューターを接続します。
- (2) USBデータケーブルを使用して、本体とパソコンを接続します。

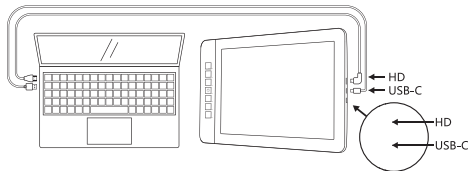

**注意：**コンピューターがグラフィック描画モニターに十分な電力を供給できない場合は、外部電源が必要です。AndroidフォンのType-Cインターフェースケーブルを使用して、外部電源用のグラフィック描画モニターの電源ポート(⏻)を接続できます。

#### 方法2：コンピューターがUSB3.1差し込み口と雷电3差し込み口の場合。

双頭のUSB-Cケーブルを使用して、本体をパソコンに接続します。

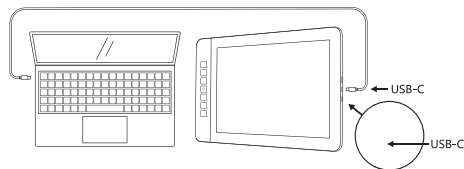

**注意：**Thunderbolt3および4を搭載した一部のMacPCおよびブル機能のUSBType-Cインターフェイスを搭載した一部のWindowsPCに適しています

### 2. Windows ドライバーをインストール：

- ① ドライバーのダウンロードとインストール：Parblo公式ウェブサイト ([www.parblo.jp](http://www.parblo.jp)) から最新のドライバーをダウンロードし、ダウンロード後にファイルパッケージを解凍し、「.exe」ファイルをダブルクリックして、指示に従ってインストールを完了します。
- ② ドライバーのインストールが完了すると、コンピューターのデスクトップの右側にあるタスクバーに小さなドライバーアイコンが表示されます。アイコンが表示されない場合は、ドライバーを再インストールしてください。
- ③ コンピューターの「ディスプレイ設定」、**「テキスト、アプリ、その他の項目を変更する」**を「100%」に設定します。
- ④ 「ディスプレイ設定」の**「マルチモニター設定」**で、「**コピーモード**」または**「拡張モード**」に設定します。
- ⑤ 「**拡張モード**」に設定されている場合は、ペンディスプレイの解像度を「1920 \* 1080」に設定し、ドライバー設定で手書きコントロール領域を液晶ペンタブレットに設定してください

### 3. Mac ドライバーインストール：

- ① ドライバーのダウンロードとインストール：Parblo公式ウェブサイト ([www.parblo.jp](http://www.parblo.jp)) から最新のドライバーをダウンロードし、ダウンロード後にファイルパッケージを解凍し、
- ② 「.pkg」ファイルをダブルクリックして、指示に従ってインストールを完了します。

- ② お使いのコンピュータのバージョンが10.14以降の場合は、操作手順に従ってセキュリティ設定を行ってください。完了後、ドライバーを開いて通常使用できます (Mac OS 10.14より以前のバージョンの場合、この手順は無視してください)。
- ③ ドライバーのインストールが完了したら、パソコンの「システム環境設定-表示」メニューを開き、表示デジタル画面の解像度を1920 \* 1080に設定します。
- ④ 「システム環境設定-表示」ページの「配置」ウィンドウで、「ミラーモード」または「拡張モード」を選択し、必要に応じて調整できます

## 5. 顧客サポート

- (1) 最新のドライバー、ユーザーマニュアル、よくある質問については、[www.parblo.jp](http://www.parblo.jp)のParbloサポートページをご覧ください。
- (2) Coast10 Proを使用する時に、問題が発生した場合、ParbloサポートページのFAQから解決策を見つけることができます。
- (3) Coast10 Proドライバーの更新の確認について：[www.parblo.jp](http://www.parblo.jp)